



तिनाउ गाउँपालिका

Tinau Rural Municipality

गाउँ कार्यपालिकाको कार्यालय

Office Of The Rural Municipal Executive

दोभान, पाल्पा
Dobhan, Palpa

स्था : २०७३/Estd. 2017 A.D.

लुम्बिनी प्रदेश, नेपाल
Lumbini Province, Nepal

पत्र संख्या /Letter No.:

चलानी नं. /Ref. No.:

दररेट पेश गर्ने सम्बन्धी सूचना

तेस्रो पटक प्रकाशित मिति २०८३।०९।१७

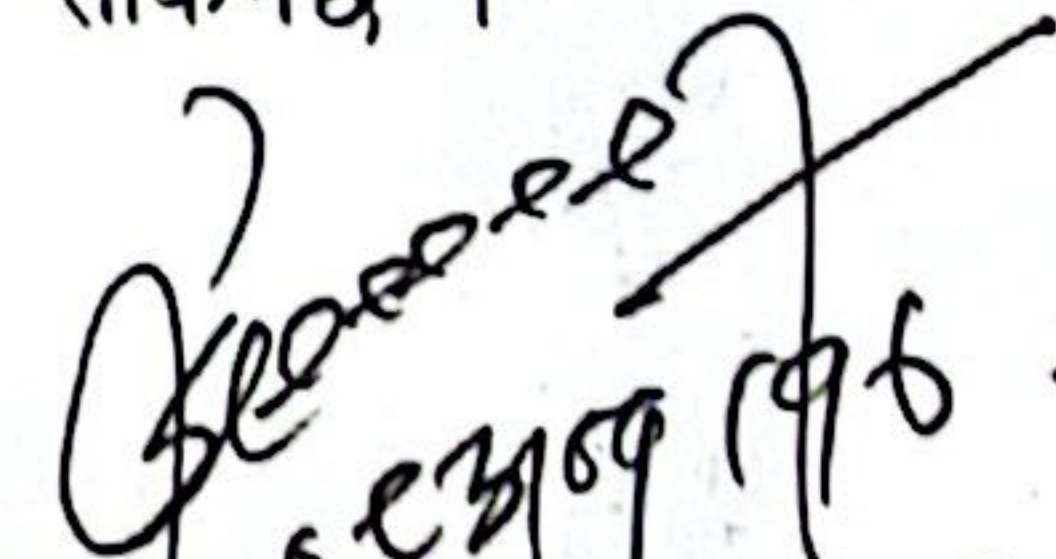
१. तिनाउ गाउँपालिकाद्वारा विभिन्न निर्माण व्यवसायी संग तपशिल बमोजिमको कार्य गर्न दररेट पेश गर्नका लागि यो सूचना प्रकाशित गरिएको छ ।

तपशिल

क्र. स	कार्य विवरण	जम्मा रकम (मुल्य अभिवृद्धि कर, भ्याट सहित) कन्टिन्जेन्सी वाहेक	दर रेट पेश गर्ने अन्तिम मिति	कैफियत
१	खानेपानी मर्मत सम्भार तथा निर्माण गर्ने कार्य तिनाउ-३, (आदर्श आ.वि टंकी निर्माण तथा पाटेशन,देउराली खानेपानी,झूमसा खानेपानी, पैठे डाँडा बाटो मर्मत, जस्ता पाता खरिद)	६,६७,७५५.७९ ।- (अक्षरुपि रु छ लाख सतसट्टी हजार सात सय पचपन्न रुपैयाँ एकहत्तर पैसा मात्र)	२०८३।०९।२३	

२. दररेट पेश गर्ने निर्माण व्यवसायीले अनिवार्य रूपमा दररेट पेश गर्ने व्यहोरा सम्बन्धमा लिखित निवेदन सहित नवीकरण भएको फर्म/कम्पनी दर्ता प्रमाणपत्रको प्रतिलिपी, नवीकरण भएको व्यवसाय दर्ता (निर्माण व्यवसायी ईजाजत प्रमाणपत्र) प्रमाणपत्रको प्रतिलिपी,मु.अ.क.दर्ता प्रमाणपत्रको प्रतिलिपी र आर्थिक वर्ष २०८१/०८२ को करचुक्ता प्रमाणपत्रको प्रतिलिपी संलग्न गरि पेश गर्नुपर्नेछ ।

३. BOQ,Specification यस कार्यालयको Website वाट समेत डाउनलोड गर्न सकिनेछ ।


दिनेश प्रशासकीय अधिकृत

प्रमुख प्रशासकीय अधिकृत



तिनाउ गाउँपालिका
गाउँकार्यपालिकाको कार्यालय
दोभान-पाल्पा-लुम्बिनी प्रदेश नेपाल
कार्यालय कोड नं: २०१०५५५०३
निर्माण कार्यको प्रविमाण अनुमान फारम

म. नं. फारम नं: ५०१

Jeel
प्रमुख प्रशासकीय अधिकृत

कार्यक्रम/योजनाको नाम: मर्मत सम्भार र खानेपानी तथा सरसफाई आयोजना
कार्यक्रम / योजनाको नाम र कार्यान्वयन हुने स्थल: तिनाउ गाउँपालिका वडा नं. ३ को विभिन्न स्थानमा
सम्पन्न हुने अनुमानित अवधि:-तीन महिना

वार्धिक वर्ष: २०८२-८३
बजेट उप शीर्षक नं:

Sno.	Item Description	Unit	Quantity	Bidder's Rate (NPR).	Bidder's Rate (in words)	Total Amount (NPR)	Remarks
A	पैठे डाँडा गोरेटो बाटो मर्मत						
1	Providing and laying of Plain Cement Concrete (Using River Sand And OPC) PCC Grade M 15 (or 1 2 4 for nominal mix) including formwork as complete as per Drawing and Technical Specifications	Cum	5.54				
B	आदर्श आ.वि पार्केशन						
1	BRICK WORK . Providing and laying brick work in 1 4CM in foundation and superstructure with approved quality first class brick in perfect line and level, finished including wetting the bricks, packing the joints and curing the work and necessary scaffolding, complete in all types and thickness of walls, associated cornices, columns, etc as per drawings, specification and instruction of engineer, all complete	Cum	2.48				
2	P C C FOR R C C. Providing and laying in position machine mixed and machine vibrated design mix cement concrete of specified grade for reinforced cement concrete work using OPC cement with various design mixes (various grades of concrete) with 20 mm graded machine crushed stone aggregate of approved quality in various locations and heights including transportation of concrete to site of placing, compaction, finished to required line and level, protection and curing, etc all complete as per drawings, specifications and the instructions of the Engineer, but excluding the cost of centring, shuttering, and reinforcement, but including the cost of admixtures in recommended proportions (as per IS 9103) to accelerate, retard setting of concrete improve workability, improve strength without impairing strength and durability as per direction of Engineer for the following grades of the structural concrete (Mix design is essential) a) P C C of M20 (1 1 5 3)	Cum	0.18				
3	STEEL REINFORCEMENT: Providing and fixing in position Fe 500 steel reinforcement of various diameter conforming to relevant IS code in R C C works including straightening, cutting, bending, binding with 20 SWG annealed wire for tying the reinforcement bars at each junctions (binding wire shall not be measured separately) including all waste and cut pieces, provision for adequate numbers of spacers, chairs, providing and placing cement mortar (1 1) cover blocks to keep the bars in intended position at all levels all complete as per drawings, specifications and instructions of the Engineer (Authorized lap length and for the bar length exceeding 10 meter in length shall be measured for the payment)	Kg	15.77				
4	FORMWORK: Supplying and laying centering, shuttering of various pattern formworks with 19/12 mm thick water proof ply wood & steel adjustable props for all kinds of R C C works for foundations, columns, shear walls, beams, slab, staircase, lintel, sill, pergola, including nails, propping scaffolding, staging, supporting and bracing in proper lines and level, sealing the joints with heavy duty brown self adhesive tape, aligning to line and levels including Ties, PVC Spacer, Providing openings/ cutouts/ pockets, applying deshuttering chemical, deshuttering as approved by the Engineer etc., complete at all levels as per drawing, specifications and instructions of the Engineer	Sqm	1.60				



तिनाउ गाउँपालिका
गाउँकार्यपालिकाको कार्यालय

दोभाने पाल्पा लुम्बिनी प्रदेश नेपाल
कार्यालय कोड नं: ८०१०५५५०३

निर्माण कार्यको परिमाण अनुमान फारम

म फारम नं: ५०१

Pras
प्रमुख प्रशासकीय अधिकृत

कार्यक्रम/योजनाको नाम: मर्मत सम्भार र खानेपानी तथा सरसफाई आयोजना
कार्यक्रम / योजनाको नाम र कार्यान्वयन हुने स्थल: तिनाउ गाउँपालिका वडा नं. ३ को विभिन्न स्थानमा
सम्पन्न हुने अनुमानित अवधि:-तीन महिना

वार्धिक वर्ष: २०८२-८३
बजेट उप शीर्षक नं:

Sno.	Item Description	Unit	Quantity	Bidder's Rate (NPR)	Bidder's Rate (in words)	Total Amount (NPR)	Remarks
5	CEMENT SAND PLASTER Providing and laying, cement sand plastering on floor, wall, ceiling, skirting, dado, cornices, etc of good finish, including raking the joints, cleaning and wetting the surface and curing the works all complete, as per drawing, specification and instruction of engineer. all complete a) 20mm thick plaster in 1:5 mix	Sqm	43.20				
6	DISTEMPER PAINTING Providing and applying, inside painting work on wall and ceiling of approved color including necessary primer (as per product manual) to give uniform color after rendering surface clean and moist (where necessary) as per specifications, drawings, and instruction of the engineer, all complete	Sqm	129.60				
C	Procurement Supply and Delivery of CGI Sheet						
1	Procurement Supply and Delivery of Nepal Standard Colour 26 Gauge Medium (0.35mm) CGI sheet	Bundle	16.00				
D	आदर्श.आ.वि ज्यामिरे खानेपानी व्यवस्थापन						
1	Site clearance including cutting the shrub, grass, bushes, tree if required etc. & uprooting, dressing, levelling & disposing the materials 30 m from the site as specified complete work as per specification and instruction of site engineer	Sqm	16.00				
2	Earth work in excavation in hard, boulder mixed soil for foundation trench including Timbering and pumping out water from the trenches(if necessary), Ramming of bottom, lift up to 2m lead 10m, stacking of excavated materials, clear from the edge of foundation trench with all complete as per specification & instruction of site engineer	Cum	1.87				
3	STONE BOULDER SOLING: Providing and laying boulder stone soling in foundation of water tank, floor, with approved quality stone/boulder in required line and leveling all complete as per drawings, specifications and instructions of the Site Incharge.	Cum	1.15				
4	Providing and laying Brick Masonry Work in Cement mortar (cement:sand 1:4) in Foundation/Structure complete excluding pointing, plastering etc all complete as per Drawing and Technical Specifications	Cum	1.09				
5	Manually mixed Plain cement Concrete (PCC) for RCC works (1:2:4) M15 for Super structural work with approved quality of cement and sand and crushed stone aggregate including mixing, laying, curing etc all complete in approval of site engineer.	Cum	0.96				
6	Manually mixed Plain cement Concrete (PCC) for RCC works (1:1.5:3) M20 for structural work with approved quality of cement and sand and crushed stone aggregate including mixing, laying, curing etc all complete in approval of site engineer.	Cum	2.22				

Checked By

2

Prepared By:

Approved By



तिनाउ गाउँपालिका

गाउँकार्यपालिकाको कार्यालय

विनायक पार्क, लुम्बिनी प्रदेश, नेपाल
कार्यालयको ब. सं. २०५५५५०३

निर्माण कार्यको प्रतिमाण अनुमान फारम

फारम नं: ५०१


प्रमुख प्रशासकीय अधिकृत

कार्यक्रम/योजनाको नाम: मर्मत सम्भार र खानेपानी तथा सरसफाई आयोजना
कार्यक्रम / योजनाको नाम र कार्यन्वयन हुने स्थल: तिनाउ गाउँपालिका वडा नं. ३ को विभिन्न स्थानमा
सम्पन्न हुने अनुमानित अवधि:-तीन महिना

आर्थिक वर्ष: २०८२-८३
बजेट उप शीर्षक नं:

Sno.	Item Description	Unit	Quantity	Bidder's Rate (NPR)	Bidder's Rate (in words)	Total Amount (NPR)	Remarks
7	Formwork, shuttering, centering for Vertical Wall with 19 mm thick waterproof ply board and steel post for all works necessary propping, scaffolding, staging, supporting inclusive of wedging and cutting holes for utilization all complete.	Sqm.	20.61				
8	STEEL REINFORCEMENT: Providing and fixing in position Fe 500 steel reinforcement of various diameter conforming to relevant IS code in R.C.C. works including straightening, cutting, bending, binding with 20 SWG annealed wire for tying the reinforcement bars at each junctions (binding wire shall not be measured separately) including all waste and cut pieces, provision for adequate numbers of spacers, chairs, providing and placing all complete as per drawings, specifications and instructions of the Engineer. (Authorized lap length and for the bar length exceeding 10 meter in length shall be measured for the payment).	Kg	221.46				
9	CEMENT SAND PLASTER 12.5 MM THICK: Providing and laying, 12.5mm thick plaster in 1:4 mix on water tank, wall etc. of good finish, including raking the joints, cleaning and wetting the surface and curing the works all complete, as per drawing, specification and instruction of engineer, all complete.	Sqm	20.65				
10	3 mm thick cement sand (1:1) punning on floor, water tank, etc. including mixing, laying and rubbing with steel trowel to a hard, smooth and shining surface and curing all complete.	Sqm	11.05				
11	Standard Manhole cover set 60-60 cm size	Set	1.00				
12	15 mm GI Pipe- Medium Class	m	2.40				
13	15 mm GI Socket	nos	4.00				
14	15mm Brass Lap (450gm)	nos	4.00				
15	50 mm GI Pipe Medium class	m	1.20				
16	50 mm End cap	nos	1.00				
E	देउराली खानेपानी व्यवस्थापन						
1	Site clearance including cutting the shrub, grass, bushes, tree if required etc. & uprooting, dressing, levelling & disposing the materials 30 m from the site as specified complete work as per specification and instruction of site engineer	Sqm	4.00				



तिनाउ गाउँपालिका

गाउँपालिका नं: ५०१



गाउँकार्यपालिकाको कार्यालय

दोभाने पाल्पा जिल्लाको प्रवेश नेपाल

सुदूरपश्चिम प्रदेशको १०५५५०३

निर्माण कार्यको परिष्कार अनुमान फारम

वीमान, पाल्पा
सुदूरपश्चिम, नेपाल
२०७३

(Signature)

प्रमुख प्रशासकीय अधिकृत

कार्यक्रम/योजनाको नाम: मर्मत सम्भार र खानेपानी तथा सरसफाई आयोजना
कार्यक्रम / योजनाको नाम र कार्यन्वयन हुने स्थल: तिनाउ गाउँपालिका वडा नं. ३ को विभिन्न स्थानमा
सम्पन्न हुने अनुमानित अवधि: तीन महिना

आर्थिक वर्ष: २०८२-८३
बजेट उप शीर्षक नं:

Sno.	Item Description	Unit	Quantity	Bidder's Rate (NPR)	Bidder's Rate (in words)	Total Amount (NPR)	Remarks
2	Earth work in excavation in hard boulder mixed soil for foundation trench including Timbering and pumping out water from the trenches(if necessary). Ramming of bottom.lift up to 2m lead 10m. stacking of excavated materials. clear from the edge of foundation trench with all complete as per specification & instruction of site engineer	Cum	0.51				
3	STONE/BOULDER SOLING: Providing and laying boulder/stone soling in foundation of water tank, floor, with approved quality stone/boulder in required line and leveling all complete as per drawings, specifications and instructions of the Site Incharge.	Cum	0.34				
4	Manually mixed Plain cement Concrete (PCC) for RCC works (1:1.5:3) M20 for structural work with approved quality of cement and sand and crushed stone aggregate including mixing, laying, curing etc all complete in approval of site engineer.	Cum	1.21				
5	Formwork, shuttering, centering for Vertical Wall with 19 mm thick waterproof ply board and steel post for all works necessary propping, scaffolding, staging, supporting inclusive of wedging and cutting holes for utilization all complete	Sq.m.	12.00				
6	STEEL REINFORCEMENT: Providing and fixing in position Fe 500 steel reinforcement of various diameter conforming to relevant IS code in R.C.C. works including straightening, cutting, bending, binding with 20 SWG annealed wire for tying the reinforcement bars at each junctions (binding wire shall not be measured separately) including all waste and cut pieces, provision for adequate numbers of spacers, chairs, providing and placing all complete as per drawings, specifications and instructions of the Engineer. (Authorized lap length and for the bar length exceeding 10 meter in length shall be measured for the payment).	Kg	123.82				
7	CEMENT SAND PLASTER 12.5 MM THICK: Providing and laying, 12.5mm thick plaster in 1:4 mix on water tank, wall etc. of good finish, including raking the joints, cleaning and wetting the surface and curing the works all complete, as per drawing, specification and instruction of engineer, all complete	Sq.m	12.04				
8	3 mm thick cement sand (1:1) punning on floor, water tank etc. including mixing laying and rubbing with steel trowel to a hard, smooth and shining surface and curing all complete.	Sq.m	5.60				
9	Standard Manhole cover set 60 x 60 cm size	Nr	1.00				
10	32 mm GI Pipe- Medium Class	m	0.60				
11	32 mm Nipple 10 CM Long	Nos	2.00				
12	32 mm Gate Valve	Nos	1.00				



तिनाउ गाउँपालिका

गाउँकार्यपालिकाको कार्यालय

दोशान, चारपा, लुम्बिनी प्रदेश, नेपाल

फैलाङ, चारपा, लुम्बिनी प्रदेश, नेपाल

निर्माण कार्यको प्रारम्भ अनुमान फारम

२०७३

कार्यक्रम/योजनाको नाम: मर्मत सम्भार र खानेपानी तथा सरसफाई आयोजना

कार्यक्रम / योजनाको नाम र कार्यान्वयन हुने स्थल: तिनाउ गाउँपालिका वडा नं. ३ को विभिन्न स्थानमा

सम्पन्न हुने अनुमानित अवधि: तीन महिना

वार्धिक वर्ष: २०८२-८३

बजेट उप शीर्षक नं:

म. फारम नं: ५०१

Double Bidder's Bid

Sno.	Item Description	Unit	Quantity	Bidder's Rate (NPR)	Bidder's Rate (in words)	Total Amount (NPR)	Remarks
13	50 mm GI Pipe Medium class	m	1.20				
14	32 mm GI Union	nos	3.00				
15	50 mm End cap	nos	1.00				
F	जुम्सा बजार खानेपानी व्यवस्थापन						
1	Earth work in excavation in hard, boulder mixed soil for foundation trench including Timbering and pumping out water from the trenches (if necessary). Raining of bottom, lift up to 2m lead 10m, stacking of excavated materials clear from the edge of foundation trench with all complete as per specification & instruction of site engineer	cum	0.11				
2	STONE/BOULDER SOLING: Providing and laying boulder/stone soling in foundation of water tank, floor, with approved quality stone/boulder in required line and leveling all complete as per drawings, specifications and instructions of the Site Incharge.	cum	0.03				
3	Manually mixed Plain cement Concrete (PCC) for RCC works (1:2:4) M15 for Super structural work with approved quality of cement and sand and crushed stone aggregate including mixing, laying, curing etc all complete in approval of site engineer.	cum	0.096				
4	Formwork, shuttering, centering for Vertical Wall with 19 mm thick waterproof ply board and steel post for all works necessary propping, scaffolding, staging, supporting inclusive of wedging and cutting holes for utilization all complete.	Sqm	19.20				
5	40 mm GI Pipe-Medium Class	RAI	100.00				
6	40 mm GI Union	Nos	19.00				
	Total Cost for all Item						
	VAT @ 13 %						
	Grand Total						
The total price of our Bid, excluding any discounts offered is:							
Name of Bidder/Suppliers							
Address							
Bidder's /Suppliers Legal Name							
Bidder's /Suppliers Address:							
Bidder/Suppliers Country of Registration:							
Bidder/Suppliers Year of Registration:							
Bidder/Suppliers Authorized Representative Information:							
Address: . Telephone/Fax numbers: Name:							
. Email Address							